



ATOM

Single Input Zone GSM Communicator - Android App



1 Trigger

Mobile Call Alert

Arming / Disarming through SMS

Control through Android App

Store 5 Phone Numbers

Optional

Magnetic sensor

Application

Fire Panel

DVR

Intrusion Panel

Features


- Single Input Zone
- Built-In Gsm Communicator
- Stores 4 Users & 1 Admin Contact No.
- Sms and/or Calls To 5 Authorized Users
- Editable 15 Bit Sms Alert Message
- Zone - Open, Close Or Both Instant Alert
- 2 Ways Of Control : Sms, Android Apps
- Event Log Info At User Android Mobile Apps.
- Led Indicators For Network Signal & Status.
- Zone Arm/Disarm Through Sms/Android Apps.
- Compact Design

Single Input
Communicator



ATOM

Single Input Zone GSM Communicator - Android App

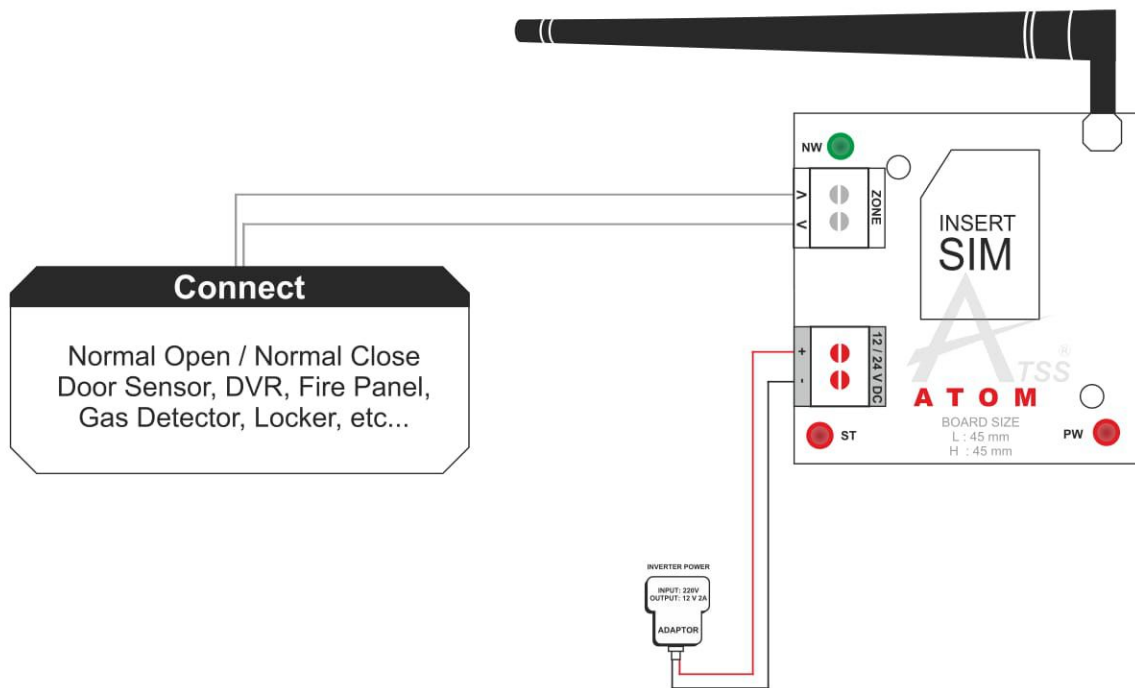

SPECIFICATION

POWER SUPPLY	
Max Power Consumption	24 watts
Supply Voltage	9-12 V
Total current Rating	2 amp (max)
ZONES	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 5 kilo Ohm For Normally Closed
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
GSM Antenna	3 db
ENVIRONMENTAL	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0°C To 45°C
Storage Temperature	-20°C~+ 60°C
PHYSICAL	
Colour	RED, BLACK
Control Panel Dimensions(mm)	(H X W X L) = 85 X 20 X 70
Weight	60 g